


BRANCH

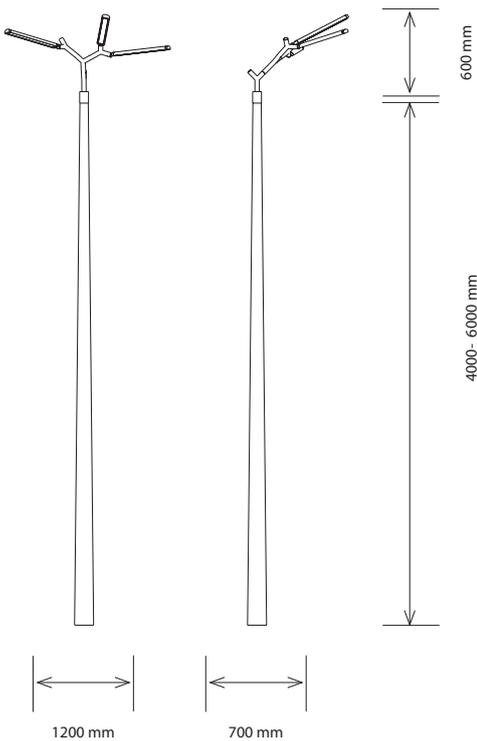

Branch street light is designed to lighten traffic areas and parks. The shape of Branch was inspired by the crown of a pine tree. The elements of the lighting fitting can be freely directed with a joint - this enables to light the road, the surrounding buildings as well as different objects at the same time. The number of LED profiles in the crown of Branch can vary according to the design and goals of the lighting solution.

Branch street light features our own aluminium profile with LED lighting called Wannabe. Wannabe has a ball joint which connects the profile to the head. This ball joint allows the profile to be adjusted freely, which means that its light can be directed in any desired direction. The head is made from powder painted aluminium in RAL 9005, either mat or glossy. Branch street light comes standard with a conical pole between 4 and 6 meters. The LED driver is located inside the pole for easy access and maintenance.

Product code	LO-BR-03	LO-BR-04	LO-BR-05	LO-BR-06
Light Source	LED	LED	LED	LED
Nr. of lighting elements	3	4	5	6
Max light output (lm)	6150	8200	10250	12300
Color rendering index (CRI)	≥70	≥70	≥70	≥70
Color temperature (K)	3000/4000	3000/4000	3000/4000	3000/4000
Power consumption (W)	60	80	99	119
Supply voltage	100...240VAC	100...240VAC	100...240VAC	100...240VAC
Supply frequency	50...60Hz	50...60Hz	50...60Hz	50...60Hz
Working temperature Ta	-30...+40°C	-30...+40°C	-30...+40°C	-30...+40°C
IP rating	66	66	66	66
IK rating	8	8	8	8
Weight (without pole, kg)	5	7	8	10