



REED

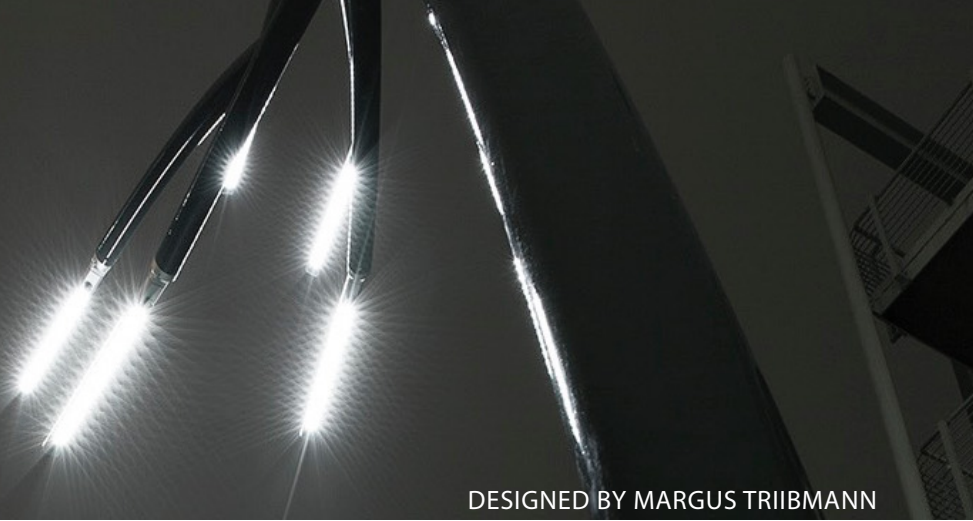

DESIGNED BY MARGUS TRIIBMANN

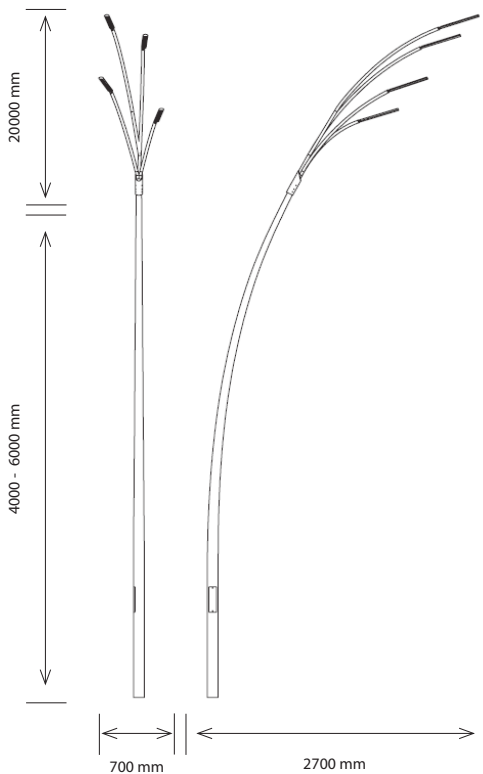

Reed streetlight is inspired by reed plants. This shape is especially suitable for installations in marina and parks near the coast but will not look out of place inland. The number of LED profiles on Reed can vary according to the design and goals of the lighting solution.

Reed light features our own aluminium profile with LED lighting called Wannabe. Wannabe has a ball joint which connects the profile to the head. This ball joint allows the profile to be adjusted freely, which means that its light can be directed in any desired direction. The head is made from powder painted aluminium in RAL 9011, either mat or glossy. Reed light comes standard with a curved conical pole of 4 to 6 meters. The LED driver is located inside the pole for easy access and maintenance.

A two-headed version of Reed is also available with two different high poles coming from a single mounting point. Both are curved conical poles, standard between 4 to 6 meters.

Product code	LO-RE-03	LO-RE-04
Light source	LED	LED
Number of lighting elements	3	4
Max light output (lm)	7200	9900
Color rendering index (CRI)	≥70	≥70
Color temperature (K)	3000/4000	3000/4000
Power consumption (W)	63	83
Supply voltage	100...240VAC	100...240VAC
Supply frequency	50...60Hz	50...60Hz
Working temperature Ta	-30...+40°C	-30...+40°C
IP rating	66	66
IK rating	8	8
Weight (without pole)	6kg	7kg